

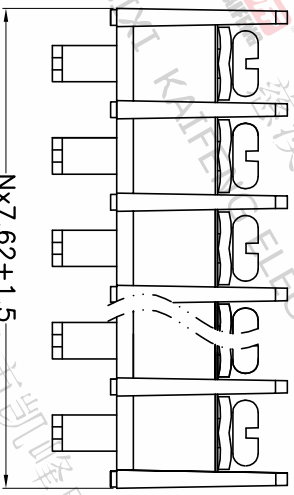
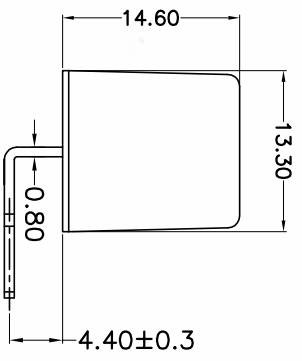


| REV. | DESCRIPTION | DATE | DRAFTER | APPROVER |
|------|-------------|------------|---------|----------|
| A1 | DWG.REL | 2020.05.20 | LiuZH | JIN |

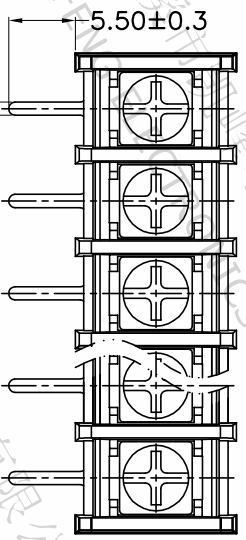

• Material

- ①Screws : M3.0 steel, Ni plated
- ②Housing : PA66,UL94V-0
- ③Terminal : Brass, Tin plated

• Electrical

- JUL IEC
- Rated voltage : 300V 250V
- Rated current : 15A 24A
- Contact resistance : 20mΩ(Max)
- Insulation resistance: 500MΩ/DC500V
- Withstanding Voltage : AC2000V/1min
- Wire range: 22-14AWG 2.5mm²


• Mechanical

- Operating temperature: -40°C ~ +105°C
- Soldering temperature: 250°C ±5/5sec
- Torque: 0.5N.m (4.43Lb.in)


• RoHS compliance

HOW TO ORDER

KF-25R-7.62-XXP-1 X-XXXXX

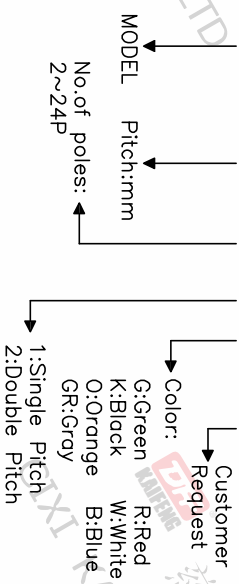

P.C.B.LAYOUT

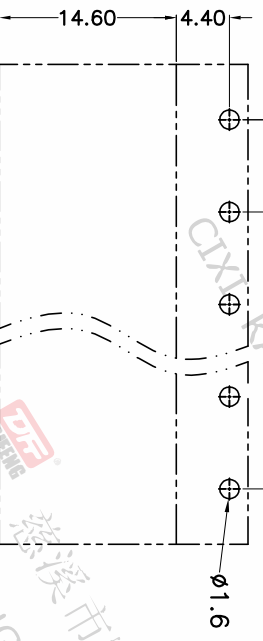

| Pitch range | Nominal dimension range | □ | ▢ |
|-------------|-------------------------|--------|---|
| >0 | >0 | 0.1/10 | □ |
| ~6 | ~30 | < | ▢ |
| ~10 | ~60 | ±2' | |
| ~24 | ~100 | | |
| ~30 | ~150 | | |
| ±0.15 | ±0.30 | | |
| ±0.20 | ±0.30 | | |
| ±0.30 | ±0.50 | | |
| ±0.70 | ±1.00 | | |
| ±1.30 | ±1.30 | | |

| DRAWING TYPE | CUSTOMER DRAWING |
|--------------|------------------|
| SCALE | 1:1 |
| SHEET | 1 OF 1 |

| DRAWING NO. | W12000532 |
|-------------|-----------|
|-------------|-----------|

| PROJECTION | UNIT | TITLE |
|------------|------|--------------------|
| 1:1 | mm | KF-25R-7.62-XXP-1X |
| SHEET SIZE | A4 | SERIES |
| | | KF-25R |

DFE 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD

